

Electronic relative and absolute pressure switch type 615

Pressure range
-1 ... 0 – 600 bar

The type 615 electronic absolute and relative pressure switches measure pressure by means of highly resistant ceramic elements. An open collector (transistor) output accommodates loads up to 100 mA. Either an N/C or N/O contact may be used, and the upper and lower switching point. Can be freely selected between 5% and 100% fs

Various electrical and pressure connections are available to suit given applications.

- Ideal for frequent switching cycles
- Long service life and long-term stability due to lack of moving parts (unlike mechanical pressure switches)
- Very low susceptibility to temperature
- Modular system for easy implementation of individual applications



Technical overview

Pressure range

Relative	-1 ... 600 bar
Absolute	0 ... 16 bar

Operating conditions

Medium		Liquids and gases
Temperature	Medium / ambient	-15 ... +80 °C ¹⁾
	Storage	-40 ... +80 °C
Tolerable overload		2 x fs (max. 1000 bar)
Repture pressure		3 x fs (max. 1200 bar)
Mechanical rating		Resistant to vibration up to 15 g

Materials in contact with medium

Pressure connection	Inox 1.4305 ²⁾
Sensor	Ceramic Al ₂ O ₃ (96%)
Sealing material	FPM, EPDM, NBR, MVQ

Electrical overview

Output	Open collector switch output for max. 100 mA at maximum supply voltage.	
Power supply	10 ... 33 VDC	24 VAC ± 15%
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.	
Accommodates loads		max. 100 mA

Dynamic response

Response time	< 5 ms
Load cycle	< 50 Hz

Protection standard

With connector	IP 65
With cable	IP 67 or IP 68

Accuracy of switching point adjustments

< 1% fs

Calibration of switching points (Please state on order)

The upper and lower switching point can be freely selected between 5 and 100 % fs.

Recommendation spacing between upper and lower switching points: > 2 % fs (factory-set at 5 and 100 % unless switching point is specified).

Electrical connection

Connector DIN EN 175301-803-A
Connector DIN EN 60130-9
Cable 1.5 m PG7

Pressure connection

Inside thread	G 1/4
	G 1/2
	G 3/4
	G 1
Outside thread	1/16 - 20 UNF
	1/2 - 14 NPT
	3/4 - 18 NPT

Mounting instruction

Installation arrangement	Unrestricted	Recommend: Pressure connection downwards
Mounting		Bracket (accessories)

Tests / Admissions

Electromagnetic compatibility	CE conformity acc. EN 61326-2-3
-------------------------------	---------------------------------


Weight

With inside thread	G 1/4, 1/16 -20 UNF	~ 200 g
	G 1/8, 1/16 -20 UNF	~ 212 g
With outside thread	G 1/4, 1/4 -18 NPT	~ 245 g
	G 1/2, 1/2 -18 NPT	~ 280 g

Packaging

Single packaging in cardboard

Function

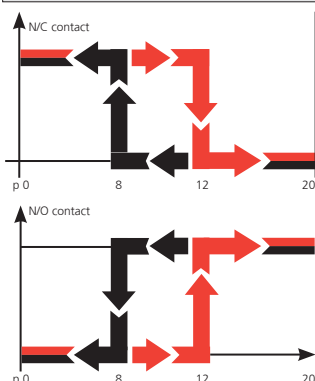

N/C contact: When pressure is applied ($p_0 \rightarrow p_{max}$) the switch will disconnect the applied load as soon as the upper switching point is reached. As the pressure falls ($p_{max} \rightarrow p_0$) the switch will connect the load as soon as the lower switching point is reached.

N/O contact: When pressure is applied ($p_0 \rightarrow p_{max}$) the switch will connect the applied load as soon as the upper switching point is reached. With a fall in pressure ($p_{max} \rightarrow p_0$) the switch will disconnect the load as soon as the lower switching point is reached.

Example: p_0 20 bar
Upper switching point 12 bar
Lower switching point 8 bar
max. switch last 100 mA

¹⁾ -40 ... +80 °C on request

²⁾ PVDF on request

Test conditions: 25 °C, 45% RH, Power supply 24 VDC
TC z.p. / TC s. -15 ... +80 °C











Order Code Selection Table 615. X X X X X X X X X X X

[illegible]





Accessories ⁶⁾

	Order number
Female connector DIN EN 175301-803-A with seal (IP 65 when installed and latched)	103510
Female connector DIN EN 175301-803-A with LED display	103528
Female connector DIN EN 60130-9	103524
Mounting bracket	104954
Calibration certificate	104551



³⁾ Other sealing material on request
⁶⁾ Accessories supplied loose

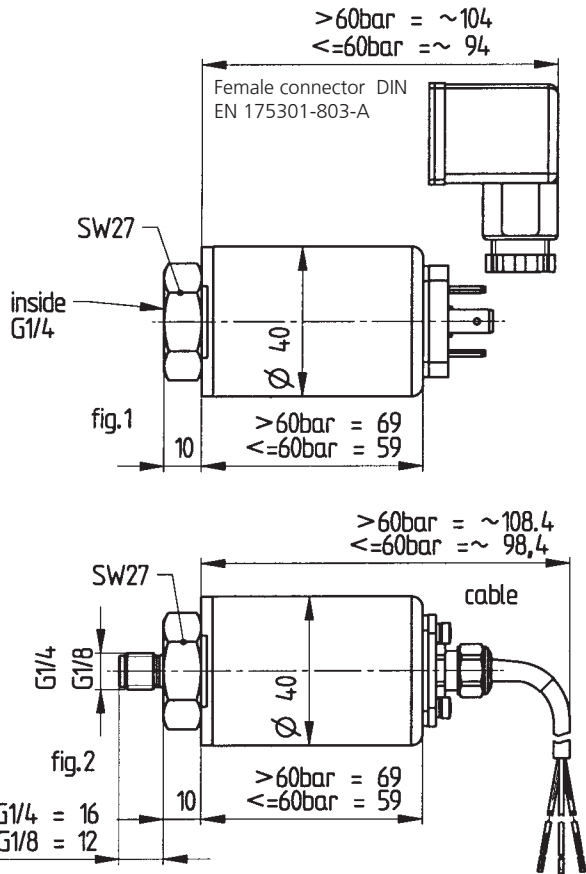

Female connector
DIN EN 60130-9

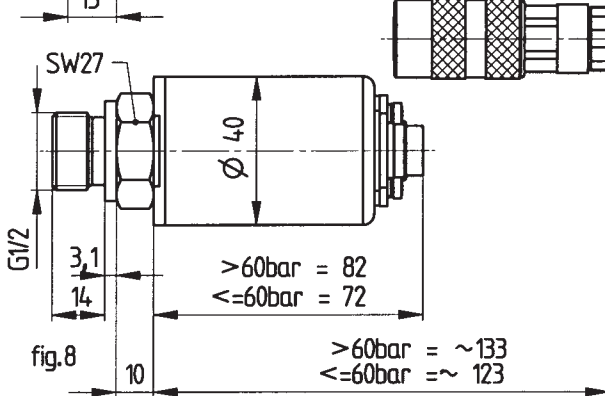

mounting bracket





FOR FINE PRESSURE AND FLOW MEASUREMENT

Huba Control AG
Headquarters

Industriestrasse 17
5436 Würenlos
Telefon +41 (0) 56 436 82 00
Telefax +41 (0) 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG
Niederlassung Deutschland

Schlattgrabenstrasse 24
72141 Walddorfhäslach
Telefon +49 (0) 7127 23 93 00
Telefax +49 (0) 7127 23 93 20
info.de@hubacontrol.com

Huba Control SA
Succursale France

Rue Lavoisier
Technopôle Forbach-Sud
57602 Forbach Cedex
Téléphone +33 (0) 387 847 300
Télécopieur +33 (0) 387 847 301
info.fr@hubacontrol.com

Huba Control AG
Vestiging Nederland

Hamseweg 20A
3828 AD Hoogland
Telefoon +31 (0) 33 433 03 66
Telefax +31 (0) 33 433 03 77
info.nl@hubacontrol.com

Huba Control AG
Branch Office United Kingdom

Unit 13 Berkshire House
County Park Business Centre
Shrivenham Road
Swindon - Wiltshire SN1 2NR
Phone +44 (0) 1993 776667
Fax +44 (0) 1993 776671
info.uk@hubacontrol.com

www.hubacontrol.com